

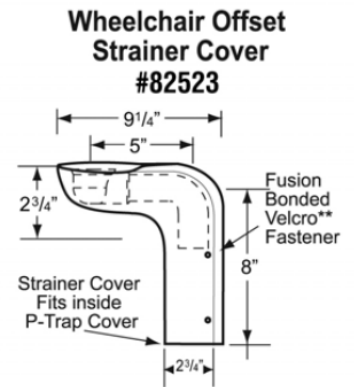


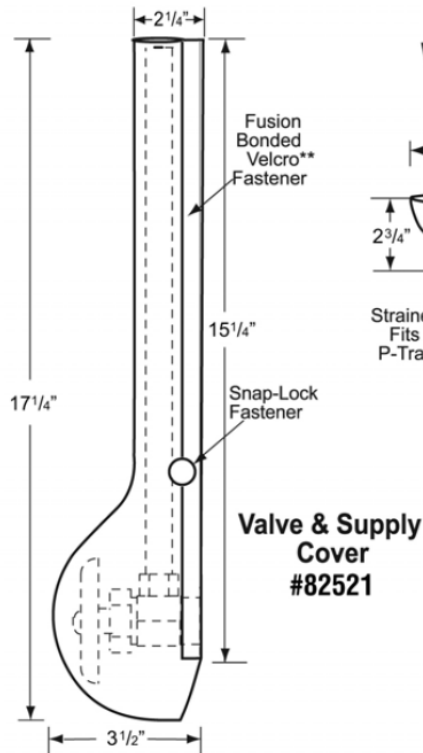

Soft Guard Plus™—White

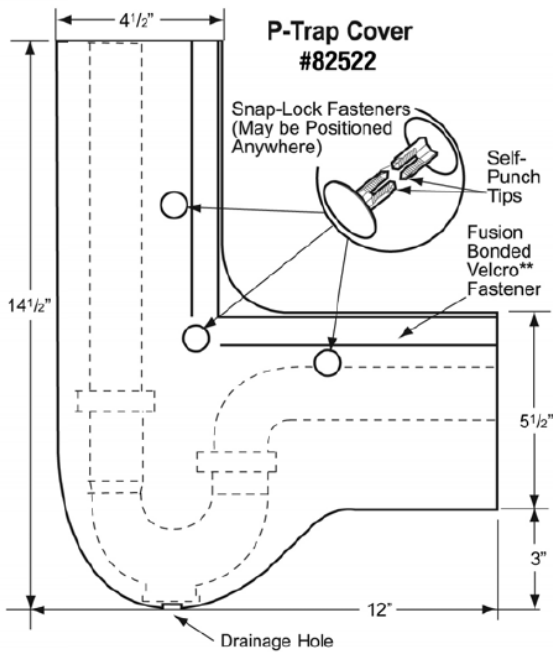

SPECIFICATION

Install 1/8" pliable PVC Shell finish Soft Guard Plus on all drainage piping including hot and cold water valve and supplies under lavatories to comply with ADA and UPC standards. Covers shall be secured by joining internal hook and loop fastening system. Furnished custom fit snap-to-lock fasteners may be used for improved tamper resistance. PVC Base Insulation Material complies with 25 Flame Spread/450 Smoke Index.

COMPLIANCE & TESTING STANDARDS:

Ada 4.19.4, ICC/ANSI A117.1 (sec 606.6). Protects wheel chair users from cuts, burns, and abrasions. PVC Base Insulation Material tested in accordance with Testing Standard ASTM E 84-07 with a 25 Flame Spread/450 Smote Index (not for plenum use).

Product #	Description
82521	Supply and Valve cover - White
82522	P-Trap cover only - White
82523	Offset cover only - White
82524	P-Trap/1 valve - White
82525	P-Trap/2 valve covers - White
82527	P-Trap/2 valve covers & 1 offset cover - White



www.ipscorp.com watertite@ipscorp.com

500 Distribution Parkway, Collierville, TN 38017, USA ■ TEL: 901-853-5001 ■ WATS: 800-888-8312 ■ FAX: 901-853-5008

